UPort™ 1400 Series

4-port RS-232 and RS-232/422/485 USB-to-serial converters with 2 KV isolation protection

- Hi-Speed USB 2.0 for up to 480 Mbps USB transmission
- 921.6 Kbps maximum baudrate for super fast data transmission
- 128-byte FIFO and on-chip H/W, S/W flow control
- Built-in 15 KV ESD protection for all serial ports
- 2 KV optical isolation protection (UPort™ 1450I only)
- IP30-rated, rugged metal housing
- COM port assignments maintained across different PCs
- Certified drivers provided for Windows (including Vista) and WinCE 5.0
- Choose bus power or external power

The certification logos shown here apply to some or all of the products in this section. Please see the **Specifications** section or Moxa's website for details.

Instant Plug & Play

The UPort™ 1400 USB-to-serial converters allow you to connect 4 RS-232/422/485 devices to your laptop or workstation through the USB (Universal Serial Bus) port. The UPort™ 1400 converters are compatible with new and legacy serial devices, and are perfect for mobile, instrumentation, and point-of-sale applications.

Simplified, Hassle-free Serial Port Expansion

USB plug & play makes serial port expansion easy, and does not require IRQ, DMA, or I/O address resources. Users no longer need to open the chassis or power down the system to add COM ports, saving on setup time and cost.

Top Serial Performance

Moxa's 20-plus years of experience in serial board design is now built into a new top performance CPU called MOXA ART. This chip equips the UPort™ 1400 converters with USB 2.0 (Hi-Speed 480 Mbps), a 128-byte FIFO, on-chip hardware and software flow control, and burst data mode, making Moxa's UPort™ converters perform far better than the competition.

Specifications

USB

Compliance: USB 1.1/2.0 compliant
Connector: USB type B
Speed: 480 Mbps (Hi-Speed USB) and 12 Mbps (Full-Speed USB)

Serial Interface

Number of Ports: 4
Serial Standards:
UPort™ 1410: RS-232
UPort™ 1450/1450I: RS-232/422/485
Connectors: DB9 male

Serial Line Protection

ESD Protection: 15 KV embedded
Optical Isolation Protection: 2 KV (UPort™ 1450I only)

Performance

Baudrate: 50 bps to 921.6 Kbps

Serial Communication Parameters
Data Bits: 5, 6, 7, 8
Stop Bits: 1, 1.5, 2
Parity: None, Even, Odd, Space, Mark
Flow Control: RTS/CTS, XON/XOFF
I/O Address: Assigned by BIOS
IRQ: Assigned by BIOS
FIFO: 128 bytes

Serial Signals

RS-232: TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND
RS-422: TxD+(B), TxD-(A), RxD+(B), RxD-(A), GND
RS-485-4w: TxD+(B), TxD-(A), RxD+(B), RxD-(A), GND
RS-485-2w: Data+(B), Data-(A), GND

Driver Support

Operating Systems: Windows (2000, XP x86/x64, 2003 x86/x64, Vista x86/x64) and WinCE 5.0

Physical Characteristics

Housing: SECC sheet metal (1 mm), IP30 protection

Weight:
Product only: 720 g (1.59 lb)
Packaged: 1345 g (2.96 lb)

Dimensions: 204 x 30 x 125 mm (8.03 x 1.18 x 4.92 in)

Environmental Limits

Operating Temperature: 0 to 55°C (32 to 131°F)

Operating Humidity: 5 to 95% RH

Storage Temperature: -20 to 75°C (-4 to 167°F)

Regulatory Approvals: EN55022 Class A, EN55024, EN61000-3-2, EN61000-3-3, EN61000-4-2, EN61000-4-3, EN61000-4-4, EN61000-4-5, EN61000-4-6, FCC Part 15 Class A, UL, CUL, TÜV

Power Requirements

Power Consumption:
UPort™ 1410 (bus power): 180 mA @ 5 VDC
UPort™ 1450 (12 to 48 VDC external power): 260 mA @ 12 VDC
UPort™ 1450I (12 to 48 VDC external power): 360 mA @ 12 VDC

Warranty

Warranty Period: 5 years

Details: See www.moxa.com/warranty

Dimensions

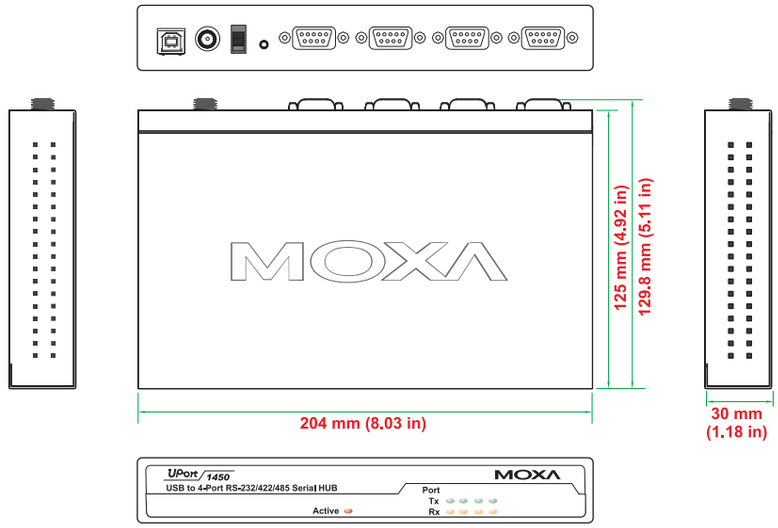

Ordering Information

Available Models

UPort™ 1410: 4-port RS-232 USB-to-serial converter

UPort™ 1450: 4-port RS-232/422/485 USB-to-serial converter

UPort™ 1450I: 4-port RS-232/422/485 USB-to-serial converter with 2 KV isolation protection

Optional Accessories (can be purchased separately)

Mini DB9F-to-TB adaptor: DB9 female to terminal block adaptor for RS-422/485 applications

Magnet Accessory: Magnets for attaching the UPort™ 1400 to the PC's housing

Power Adaptor: Available for the UPort 1410 (if the USB port does not provide enough power)

Package Checklist

- UPort™ 1400 USB-to-serial converter
- 1 mini DB9 female to terminal block adaptor (UPort™ 1450 and 1450I only)
- Power adaptor (UPort™ 1450 and 1450I only)
- Document and Software CD
- Quick Installation Guide (printed)
- Warranty Card